

**C2567W-B-ENG**




**COMPACT STRUCTURE**

- Finishes : **White**
- Body Material : **Premium Vitreous China / Ceramic**
- Installation : **Wall-mounted / Wall-hung setup**
- Flushing Mechanism : **Top-Inlet configuration designed or exposed mechanical or sensor flush valves**
- Valve Type
- Power Supply

**DIMENSIONS & TECHNICAL SPECIFICATIONS**

- Total Height : **765 mm ±15 mm**
- Overall Width : **350 mm +7 mm**
- Projection / Depth : **310 mm ±7 mm**
- Waste Outlet Diameter : **Diameter 47 mm**
- Wall-to-Discharge Centerline : **147 mm ±3 mm**
- Hanger Fixing Bolt Centers : **173 mm ±4 mm**

**TECHNICAL SPECIFICATIONS**

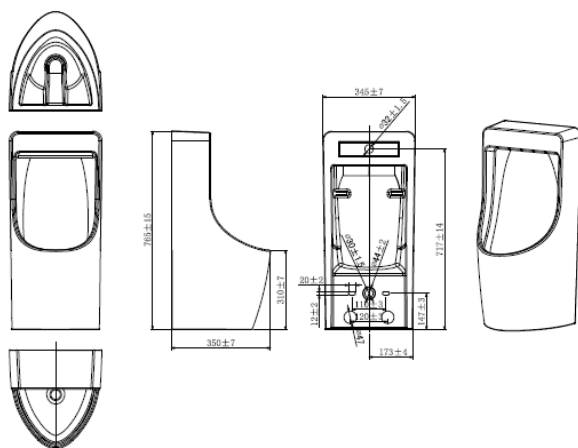

**PRODUCT CONFIGURATION OPTIONS**

- Compatible with exposed manual flush valves or top-inlet exposed sensor valves.
- Designed for standard commercial rim installation heights (typically 600 mm to 650 mm from finished floor to lip).
- Optional heavy-duty wall fixing bracket kits for reinforced structural anchorage.



*The Inspirione tap series sets the new benchmark for public restroom solutions. With the first actuation of the Smart Tap, soap is released and afterwards a smooth water flow for a clean, hygiene, and efficient handwashing.*

The information contained in this document is subject to change without prior notice.