

**T10S**




**COMPACT STRUCTURE**

- Finishes : **White**
- Body Material : **Premium Vitreous China / Ceramic**
- Installation : **Wall-hung configuration utilizing a secure heavy-duty bracket system**
- Flushing Mechanism : **Integrated electronic smart sensor system (Inductor)**
- Valve Type : **Solenoid pilot-actuated valve**
- Power Supply : **AC/DC compatible electricity supply connection**

**DIMENSIONS & TECHNICAL SPECIFICATIONS**

- Total Height : **1000 mm**
- Overall Width : **385 mm**
- Projection / Depth : **395 mm**
- Lip Height : **328 mm**  
(from finished floor)
- Waste Outlet Diameter : **Diameter 50**
- Wall-to-Discharge Centerline : **145 mm**
- Hanger Fixing Bolt Centers : **205 mm**
- Water Supply Inlet Offset : **130 mm (from center line)**
- Operating Water Pressure Range : **Minimum 0.7 kgf/cm<sup>2</sup> – Maximum 7 kgf/cm<sup>2</sup>**

**TECHNICAL SPECIFICATIONS**

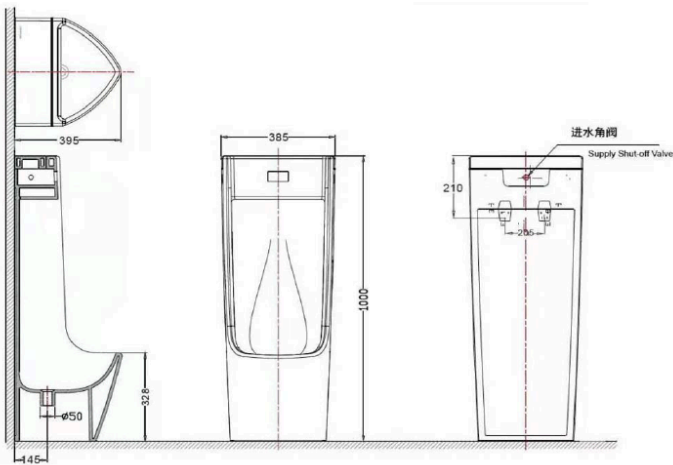

**PRODUCT CONFIGURATION OPTIONS**

- Optional integrated matching ceramic privacy partitions.
- Compatible with premium commercial-grade brass supply shut-off valves.
- Customizable automatic pre-flush and post-flush stadium mode cycles.



*The Inspirione tap series sets the new benchmark for public restroom solutions. With the first actuation of the Smart Tap, soap is released and afterwards a smooth water flow for a clean, hygiene, and efficient handwashing.*

The information contained in this document is subject to change without prior notice.